# KillTest

質量更高　服務更好

# 學習資料

http://www.killtest.net

一年免費更新服務

**Exam** : **1Z0-878**

**Title** : Oracle Solaris 10 System Administrator Certified Professional Exam, Part II

**Version** : Demo

1.DRAG DROP

Place each syslogd severity level on the correct description.

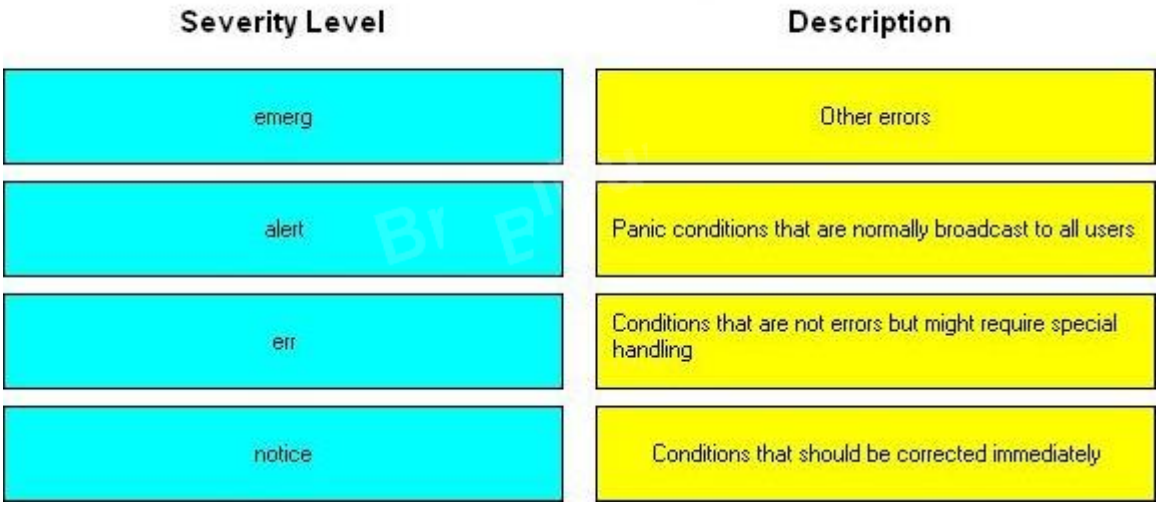


**Answer:**

Place each syslogd severity level on the correct description.

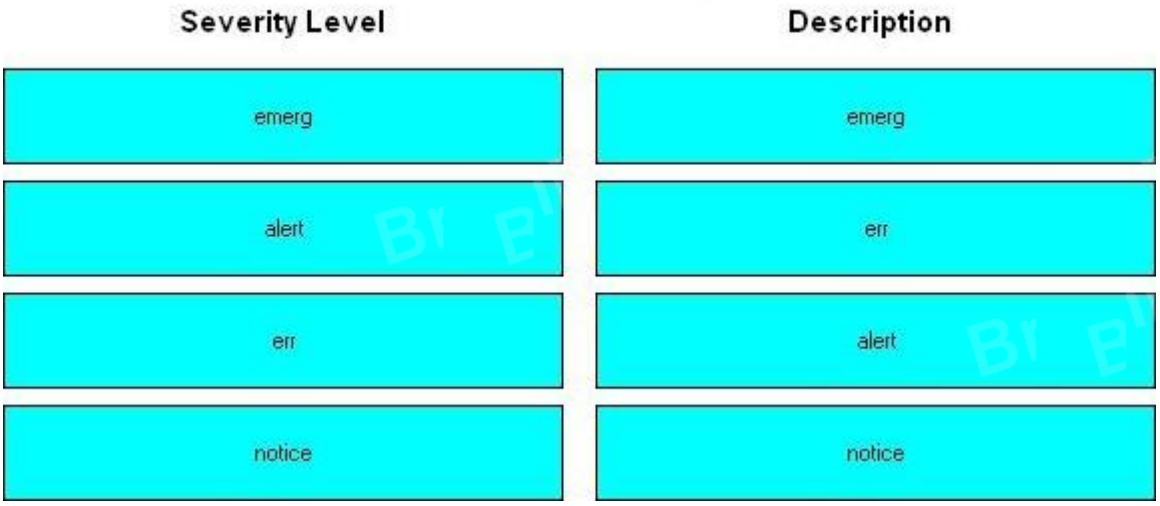


2.The security administrator wants to assign user bob to a netsec role so that the user can run the ifconf ig (iM) and snoop (iM) commands with a rights profile named NSM.
Which entries will be contained in the /etc/security/exec_attr file after the required RBAC configuration has been implemented when using privileges rather than uid 0?
A. NSM:suser:cmd:::/sbin/ifconfig:privs=sys_net_conf ig NSM:suser:cmd:::
Aisr/sbin/snoop:privs=net_rawaccess
B. HSM:bob:cmd:::/sbin/ifconfig:privs=sys_net_config NSM:bob:cmd:::
Aisr/sbin/snoop:privs=net_rawaccess
C. HSM:netsec:cmd:::/sbin/ifconfig:privs=sys_net_config NSM:netsec:cmd:::
Aisr/sbin/snoop:privs=net_rawaccess
D. NSM:Solaris:cmd:::/sbin/ifconfig:privs=sys_net_config NSM:Solaris:cmd:::
Aisr/sbin/snoop:privs=net_rawaccess
**Answer:** D

3.Given the command and output:
# profiles -1 testroie
Audit Control:
/etc/init.d/audit euid=0, egid=3 /e t c/securi ty/bsmconv uid= 0 /e t c/secur i t y/bsmunconv u i d = 0
/usr/sbin/audi t euid= 0 /usr/sbin/audi tconfig euid= 0 /usr/sbin/auditd uid=0
All:
And given the fact that testrole executes commands with a profile shell, with what effective UID and real UID will the /usr/sbin/auditd program be started?
A. effective UID 0 and real UID 0
B. effective and real UID of testrole
C. effective UID of testrole and real UID 0
D. effective UID 0 and real UID of testrole
**Answer:** A

4.Given the entry from the /etc/user_attr file:
Userl0::::profiles=User Security,Maintenance and Repair;roles=MediaAdmin;type=normal
Which statement is correct?
A. The user10 account is a role account.
B. The MediaAdmin role is defined in the /etc/security/auth_attr file.
C. The User Security, Maintenance and Repair profile is defined in the /etc/security/prof_attr file.
D. The User Security and Maintenance and Repair profiles are defined in the /etc/security/prof_attr file.
**Answer:** D

5.On a Solaris 10 OS, you want to enable a sysiog message for all incoming inetd requests.
Which command do you need to execute?
A. inetadm - Mtcp_trace=true
B. inetadm - Mtcp_wrappers=true
C. edit /etc/inetd.conf and add a tcp wrapper to each enabled service
D. edit /etc/init.d/inetsvc and add the -t option to the inetd invocation
**Answer:** A